

Accu-Device Kombi 7011-DS5

For operation on EC construction sites only permissible with mechanical holding device according to EN 13155

for planar stabilized, vertical lifting and transporting manual turning through ±90 degrees manual tilting through 90 degrees



Vertical

Horizontal




+/- 90 degrees Turning through

Tilting through 90 degrees

suitable for lifting material properties e. g.	gas-tight smooth glass panes, insulation glass units, plastic and ceramic plates, coated boards
Suction cup type	388
Diameter in action approx. mm	300
quality of suction cups	black rubber abrasion possible up to 100° C heat resistant
number of suction cups	6 4
safe working load on smooth and clean surface at 60 % vacuum	kg 600 400
dead weight approx. kg	87 82
frame size approx. mm	1300 x 1000
structural depth approx. mm	255
voltage charger for battery	230 Volt 50/60 Hz 1Ph
Item No.: 7011-DS...	6-0910 4-0910
voltage charger for battery	110 Volt 50/60 Hz 1Ph
Item No.: 7011-DS...	6-0910-110 4-0910-110
other frame sizes	on request
Accessories on request	protection cap for suction cup 388
Item No.: 388-SCHUTZ	cable remote control /E SUCTION/RELEASE
Item No.: 7003-BK/DS	infrared remote control /E SUCTION/RELEASE
Item No.: 7003-IR2S	infrared remote control /E SUCTION/RELEASE
Item No.: 7003-BF/DS	only outside the EC
Item No.: 7003-VLDS	set extensions (left / right)
Item No.: 7003-GTW2	suspension gear transport carriage

Also available as 2-circuit vacuum lifting device (Type 7211-DS5) in accordance to EN 13155 / prEN 13035

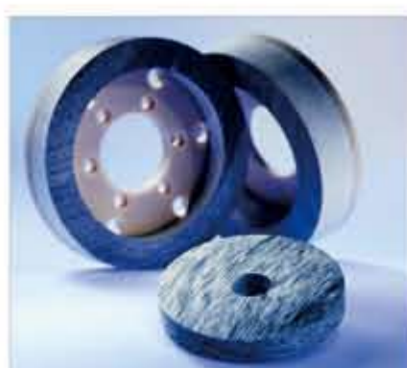

CUTTING TABLE 332-BKM



GRINDING SERIES EB925



WATERJET RC3015



QUICKDRILL CLAMP MACHINE



ROCK PROCESSING MACHINE

