GW-HH350


HH350,with worm gear motor



Technical data:

Door leaf mode	Single-opening	Double-opening
Door leaf weight	Max 400kg	Max 2*350kg
Door leaf width	DW=500-2000mm	DW=500-2000mm
Voltage	AC 100-240V,50Hz-60Hz	
Opening speed	10-55cm/s (Adjustable)	
Motor	100W	
Life cycle	2 million cycles, approved by TÜV	
Certification	CE	
Warranty	36 months	
Features	18-parameter controller with travel distance memory, two-stage reduction motor, narrow lintel track with dust brush, built-in receiver for wireless accessories	

Cross section details

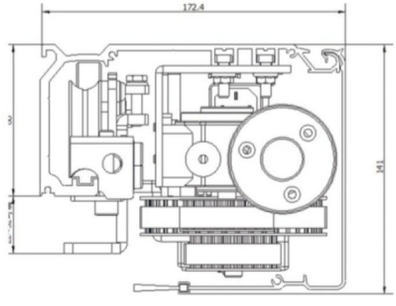

Product features

Digital display, button adjustment design, easy and accurate for use,
18 program for setting
Rubber line and brush on cover reduce operation noise
S pecial hardware design for heavy duty, Max for 350kgs
Built-in receiver for remote, easy for use



Controller

18 parameters + 3 DIP switches



Key features

Travel distance memory function: the travel distance does not change after the system restarts. On first installation, reset the travel distance to suit the project.

Built-in receiver for wireless accessories.

DIP switches select normal or toggle mode, auto lock or lock by signal, and left open or right open.

The display shows 17 parameters daily (opening speed, closing speed, braking speeds, external photocell status, operating times selection and more). The 18th parameter is displayed when the Distributor Pad is connected.


Work times can be limited for projects and adjusted to unlimited after the balance payment is made.

Technical data:

Adjust method	18 parameters + 3 DIP switches
Setting work cycle	Memory work cycle (reset on first installation)
Partial open	20%-90% (Adjustable)
Emergency stop	Yes, can be used for breakout door
Lock signal	Auto lock / Lock by signal
Mode selection	Auto / Full open, Half open, Lock, Exit only
Lock mode	Fail safe / Fail secure
Work times	Unlimited / 100,000 times / 10,000 times

Track & Motor

Track with cover, fitted in narrow door lintel

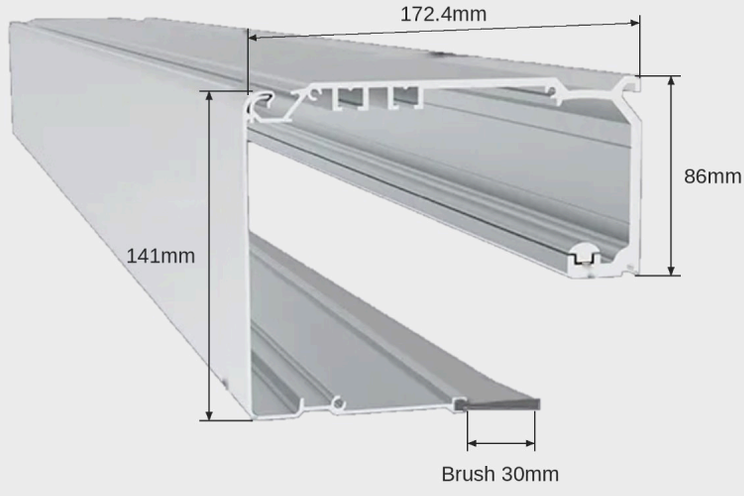


▶ Track features

The HH350 track is fitted in a narrow door lintel.

The cover comes with a brush to keep dust out of the rail. Rubber strip for less noise.

The hanger passes through behind the motor and controller to ensure the widest opening size.

▶ Motor


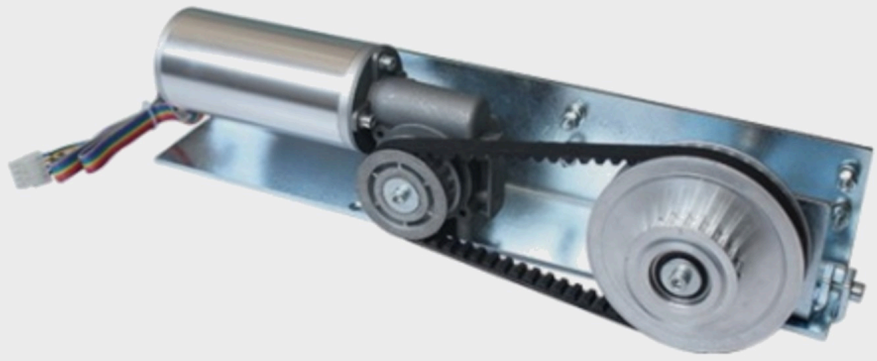


Technical data:

Motor details	100W, two-stage reduction box
Track dimension	172.4mm x 141mm / 86mm
Brush	30mm
Rubber strip	Yes, for less noise

Standard Packing

Supplied with every operator set

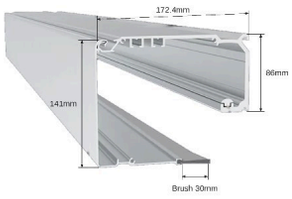 Track & Cover (length optional)	 Controller	 Motor	 Power switch
 2-in-1 sensor (IS02)	 Photocell	 Function remotes	 Belt
 Pulley	 Hangers	 Stopper	 Belt connector
 Screws			

Suitable for different doors:

Frame door	Standard packing is for frame door
Frameless door	Glass clamps to be purchased separately